



# vSAN iSCSI Target Usage Guide

Recommendations for vSAN 8 U3 and  
VMware Cloud Foundation 5.2

January 29, 2025

# Table of Contents

- Introduction .....3
- Guidance – Availability .....3
  - Storage Policies 3
  - Multipathing 3
- Guidance – Performance .....3
  - Storage Policies 4
  - Multiple Targets 4
- Guidance – Security .....4
  - Network segments and VLANs 4
  - Encryption and Authentication 4
- Guidance – Applications .....4
  - iSCSI Volumes versus SCSI3-PR 4
- Interoperability and Limitations .....5
- Summary .....5
  - Additional Resources 5
  - About the Author 6

## Introduction

The vSAN iSCSI Target service is a cluster-based service in vSAN that gives users the ability to provision volumes that are used for the purpose of attaching as block volumes within a guest. Compared to other data services in vSAN, it is not widely used, but aims to help address specific application requirements. For example, legacy workloads and applications that may require mounting a block volumes for tasks such as application-level clustering. Since vSAN stores data in a unique [object-style format](#), it requires an additional service to present data as a block-based volume.

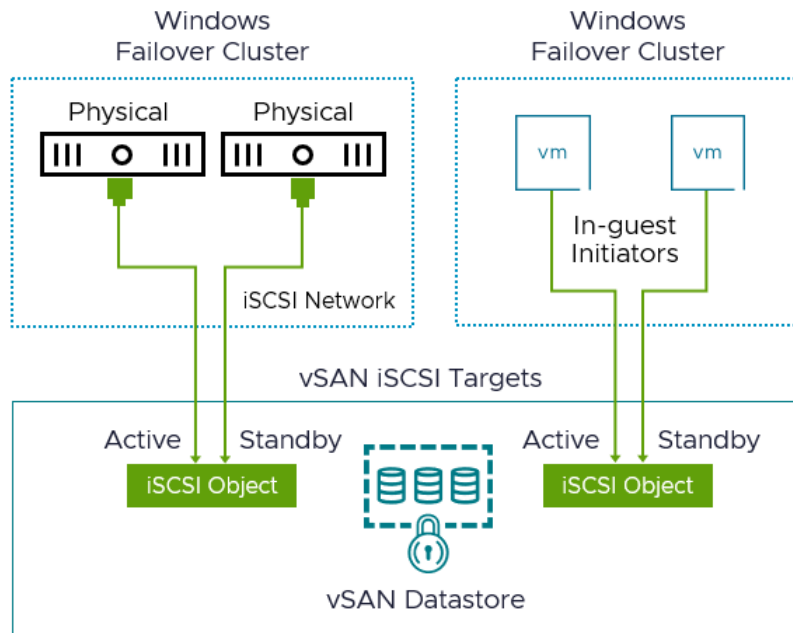


Figure. An example of WSFC systems connecting to an iSCSI target.

While advancements in vSAN such as the support for SCSI-3 persistent reservations (SCSI3-PR) result in a better way to address some of these conditions, the iSCSI Target service can be useful in many ways. This documentation provides information relevant to the use and administration of the iSCSI Target service.

Note that the iSCSI Target service is NOT intended to serve as block based storage for ESXi hosts. This type of configuration is unsupported. For more informations on limitations and support, see [KB article 326884](#)

## Guidance – Availability

### Storage Policies

Much like VMs that reside on a vSAN datastore, storage policies define the level of resilience that is prescribed to an iSCSI volume. All of the typical resilience settings are available to iSCSI volumes regardless of the topology – single site vSAN clusters, vSAN stretched clusters, etc.

### Multipathing

Multi-Path IO (MPIO) is supported by the vSAN iSCSI Target Service. Every target has an owner and initial connections will be redirected using iSCSI redirects to the owner's path. In the event of a failure, reconnection attempts will be redirected to the new iSCSI LUN target owner. An initiator can connect to any host, but will always be redirected to the current active host.

## Guidance – Performance

## Storage Policies

Each iSCSI Target can be assigned a storage policy. When running iSCSI Target services in vSAN OSA, using RAID-1 mirroring will provide the best performance for the LUNs served to the guest workloads. Since vSAN ESA can store data using the much more space-efficient RAID-5/6 erasure coding at the performance of RAID-1, it is recommended to use RAID-5/6 for all iSCSI targets.

## Multiple Targets

iSCSI Targets have a limited maximum queue depth and it is recommended to utilize more targets to increase performance. Note that a given target will only be active for a single host so deploying more targets will lead to an even usage of paths for performance balancing. You can see the I/O owning Host from within the UI. It should be noted that iSCSI utilizes more compute overhead, and because of added pathing will add additional latency and overhead compared to running Virtual Machine disks directly on the vSAN datastore. If performance is a concern, iSCSI should only be used when native vSAN is not an option.

## Guidance – Security

### Network segments and VLANs

iSCSI storage traffic is transmitted in an unencrypted format across the LAN. Using VLANs to isolate iSCSI traffic on a network will help ensure that this type of traffic remains within its own broadcast domain, and logical security boundary.

### Encryption and Authentication

CHAP (Challenge Handshake Authentication Protocol) verifies identity using a hashed transmission. The target initiates the challenge. Both parties know the secret key. It periodically repeats the challenge to guard against replay attacks. CHAP is supported by the vSAN iSCSI Target service. bidirectional CHAP is supported.

## Guidance – Applications

### iSCSI Volumes versus SCSI3-PR

vSAN supports SCSI3 persistent reservations, or SCSI3-PR. Application level clustering services like Windows Server Failover Clusters (WSFC) need to share a disk in order to determine ownership across the application cluster. This feature allows for **VMs running WSFC to use a shared VMDK on a vSAN datastore**. This simplifies design and administration, reduces performance overhead, offers full interoperability with vSAN features, and provides a consistent experience. WSFC running on physical servers should continue to use vSAN iSCSI services to achieve a shared quorum disk.

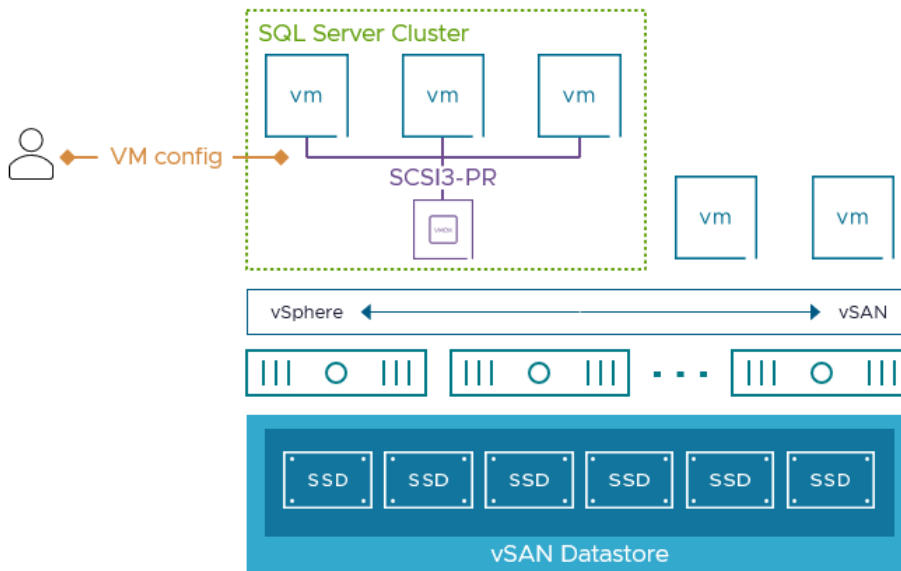


Figure. WSFC workloads using SCSI-PR instead of iSCSI volumes for a shared quorum disk.

## Interoperability and Limitations

[KB article 326884](#) details limitations, support, and configuration maximums, and should be referred to as the source of truth for these types interoperability and support considerations.

## Summary

The calculations in this document will provide a reasonably accurate estimate of bandwidth needed for a stretched cluster environment. While the numbers may produce a result that are well below the bandwidth you currently have between sites, having high bandwidth, low latency connectivity will provide a much better experience for your workloads and the consumers who use them.

## Additional Resources

The following are a collection of useful links that relate to bandwidth sizing for vSAN stretched clusters.

[Performance Recommendations for vSAN ESA.](#) This is a collection of recommendations to help achieve the highest levels of performance in a vSAN ESA cluster. Many of these same recommendations apply to vSAN storage clusters.

[vSAN Proof of Concept \(PoC\) Performance Testing.](#) This is a collection of recommendations that will guide users to test the performance of a vSAN cluster. While it is currently written for the OSA, many of the testing methods used are also applicable to the ESA.

[Design and Sizing for vSAN ESA clusters.](#) This post offers some nice guidance on using the vSAN Sizer for the ESA that summarizes some key points that can be found in the VMware vSAN Design Guide.

[vSAN Network Design Guide.](#) This network design guide applies to environments running vSAN 8 and later.

[vSAN technical blogs.](#) Stay up to date on the most recently published technical information about vSAN. These posts are created by the vSAN Technical Marketing team.

[VMware Resource Center.](#) The location for design guides, operations guides and other technical white papers on vSAN. These assets are created by the vSAN Technical Marketing and Product Enablement teams.

[Official vSAN documentation.](#) The location for all “how to” documentation on vSAN.

## About the Author

Pete Koehler is a Product Marketing Engineer in the VCF division at Broadcom. With a primary focus on vSAN, Pete covers topics such as design and sizing, operations, performance, troubleshooting, and integration with other products and platforms.

